

Hand valve

3/2 Control valve



3/2-5/2 Air pulse valve



Application:


Our hand valves are used where carriage and units of machines and devices are moved by hand and pneumatic signals simultaneously need to be made. The valves are in two options, as a 3/2 and as 3/2-5/2 air pulse.

Design:

Valves are suitable for maintenance-free operation, it is recommended only clean and dry air.


The valve housing is made of anodized aluminum. The other parts are made of corrosion-free or corrosion-resistant materials.

3/2 Control valve

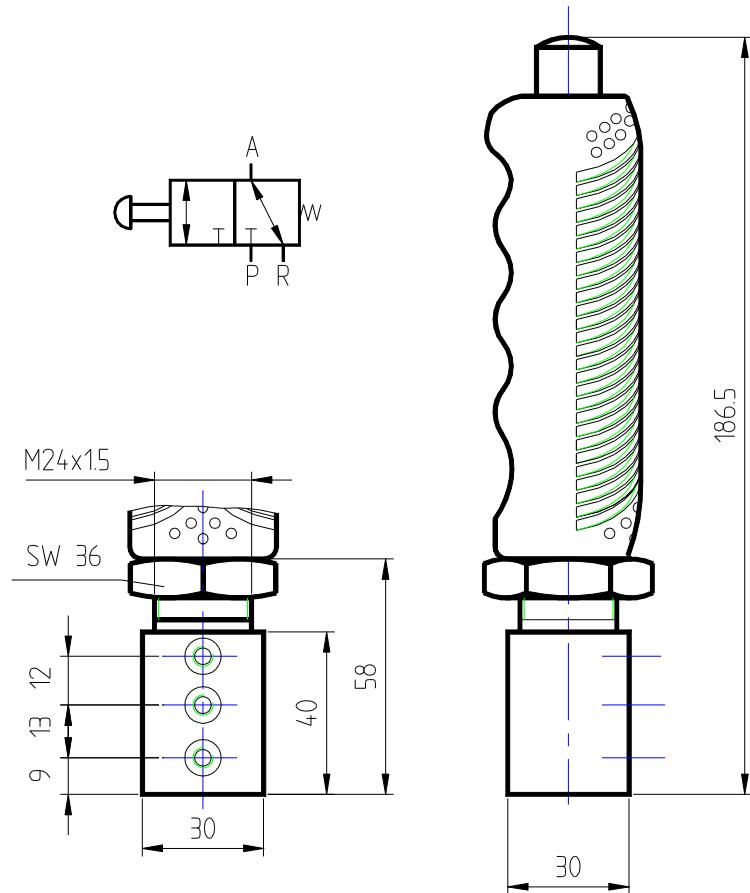

3/2-5/2 Air pulse valve

pneumatically actuated
or with spring reset

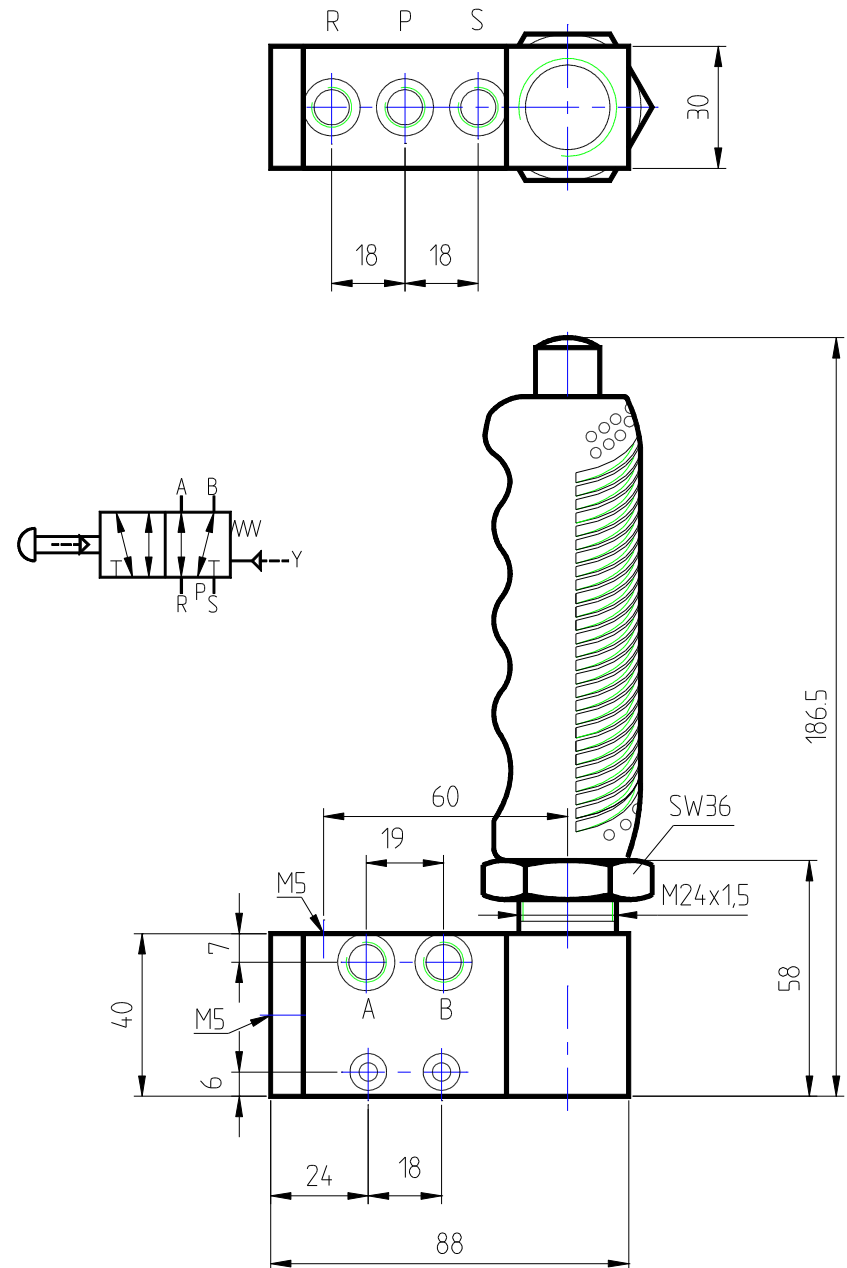

Technical Data hand valve:

Design: 3/2 Control valve
(Item no. 5002)

Connection: M5

Air consumption: 2 mm

Air consumption: approx. 120 l/min

Operating pressure: max. 8 bar

Medium: Filtered, lubricated or non-lubricated compressed air

3/2 - 5/2 Air pulse valve
pneumatic (Item no. 5003)
spring reset (Item no. 5005)

G1/8"

3 mm

approx. 250 l/min

max. 8 bar