



Adjustable two-spindle drill V-MSK 7-2

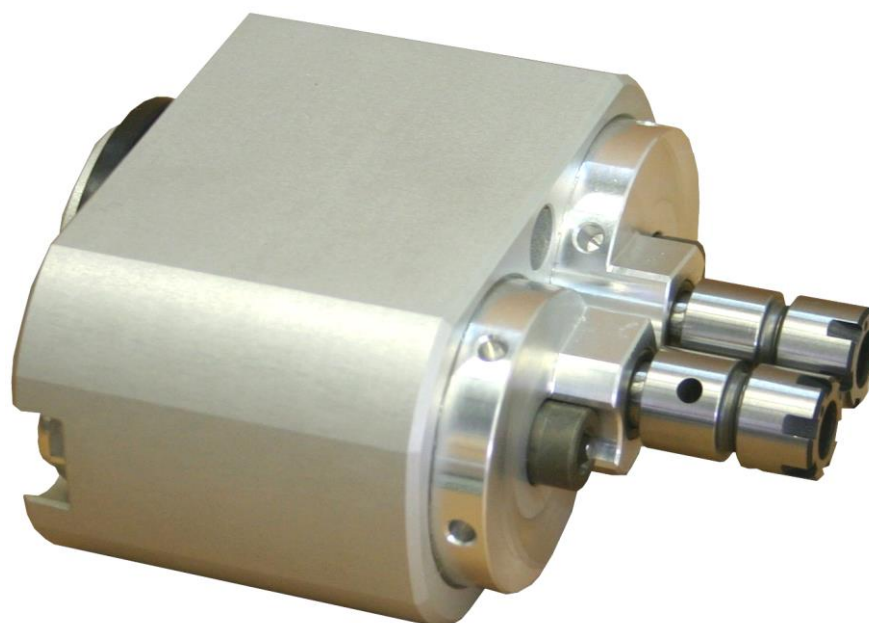


Technical data:

Drilling capacity in St 50:	max. 7 mm
Adjustment range:	min. 18 mm, max. 78 mm
Transmission ratio:	$i = 0.88$
Tool clamping:	Chuck ER 11 clamping range from 0.5 mm to max. 7 mm clamping diameter in increments of 0.5 mm
Transmission oil used:	Mobil Teresstic T 32
Weight:	1.25 kg
Assembly:	see drawing


Attachment variant 1: with locking ring

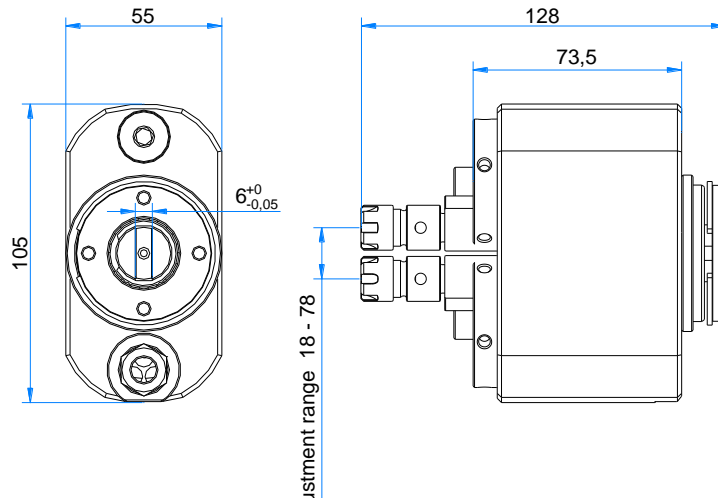


Attachment variant 2: screwed

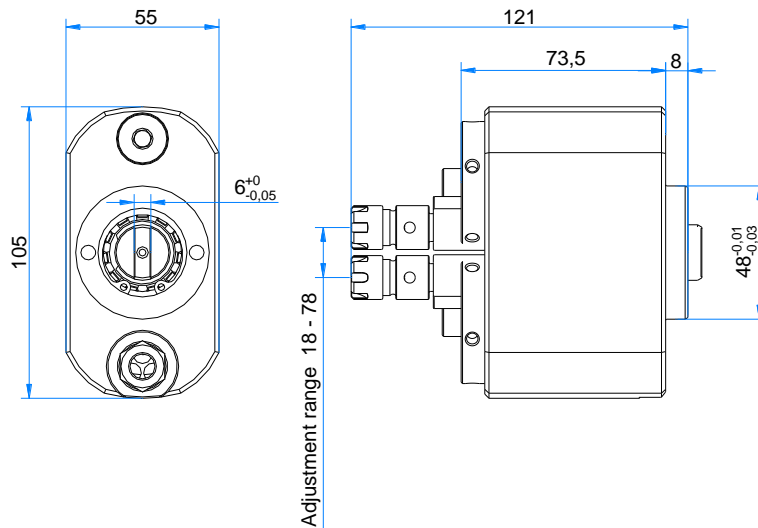


Reception flange for variant 1: with locking ring

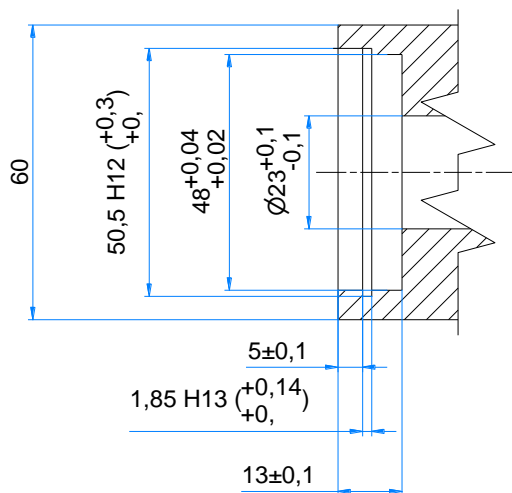


Reception flange for variant 2: Screwed

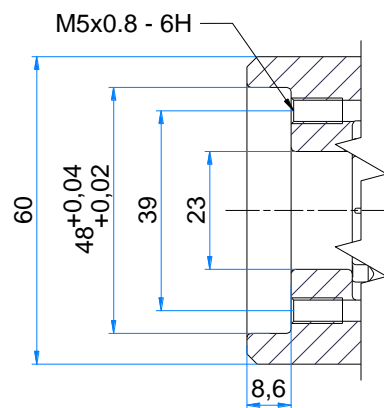

Adjustable two-spindle drill

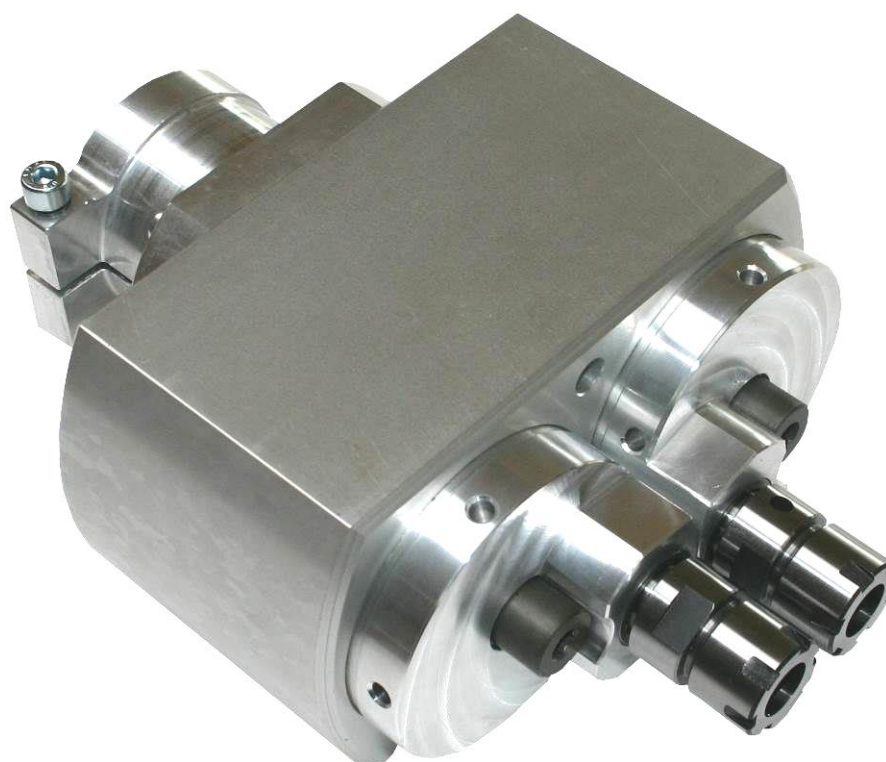

Technical Data	V- MSK 7-02 Item no.: 08 03 00 1007	V- MSK 10-02 Item no.: 08 04 01 1001	V- MSK 13-02 Item no.: 08 05 01 1001
Drilling capacity in St 50	7 mm	10 mm	13 mm
Adjustment range	min. 20 mm, max. 132 mm	min. 25 mm, max. 125 mm	min. 32 mm, max. 144 mm
Transmission ratio	1:1	1:1	1:1
Tool clamping	Chuck ER11 Clamping range 0.5-7 mm	Chuck ER16 clamping range 1-10 mm	Chuck ER20 Clamping range 1-13 mm
Transmission oil used	Mobil Teresstic T32	Mobil Teresstic T32	Mobil Teresstic T32
Weight	3.1 kg	4.4 kg	6.6 kg
Fixture	See drawing	See drawing	See drawing

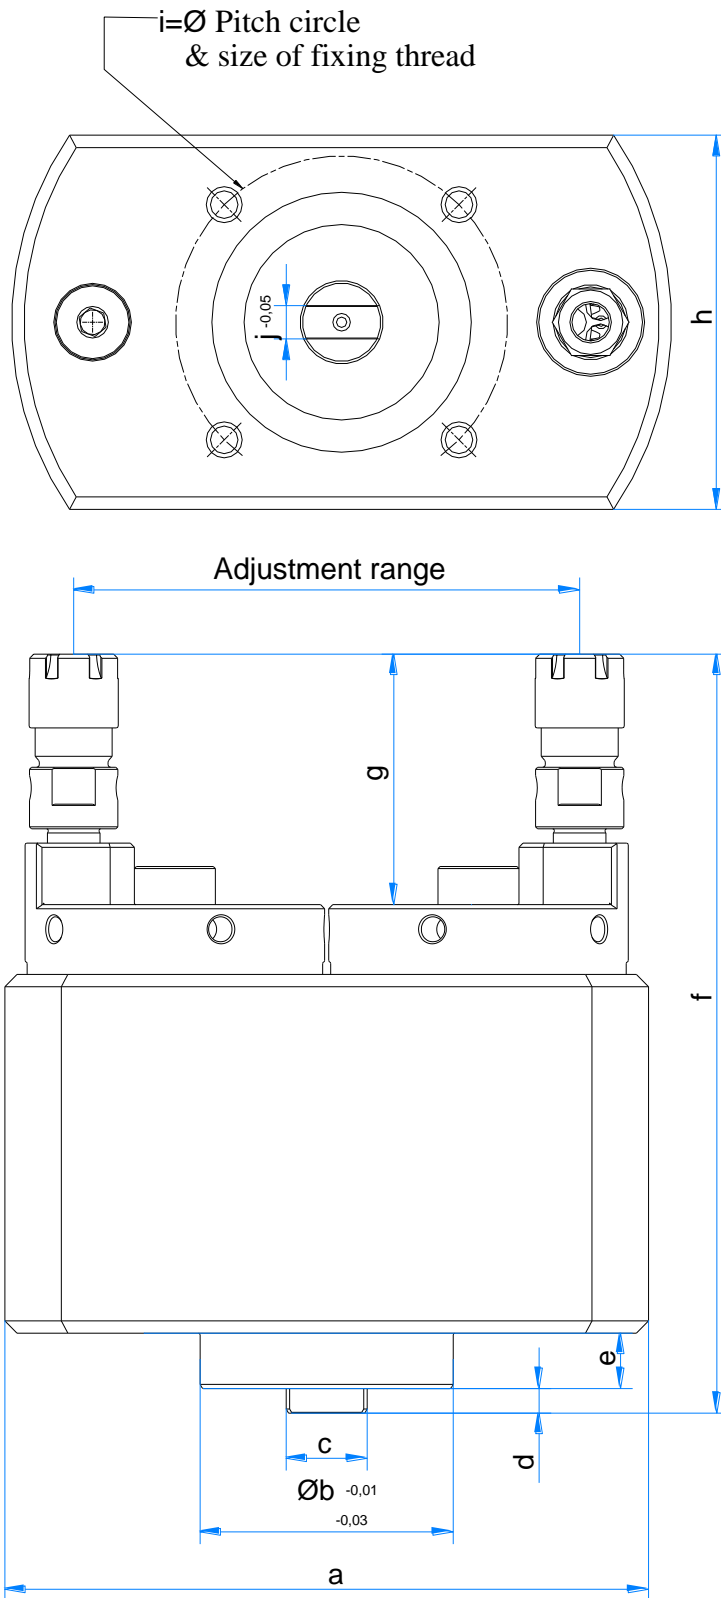

Figures in mm